




PerformanceLine

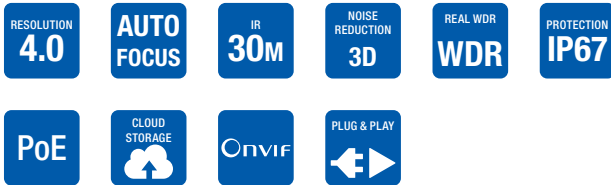

FEATURES

- 4 MP resolution with CMOS sensor
- H.264, H.264+ and MJPEG
- Double stream, IR illumination up to 30 meters
- 2,8 ~ 12 mm motorized lens with autofocus
- BLC, real WDR, 3D-DNR
- Privacy mask, ROI
- Reset button
- IP67
- PoE supported
- Plug&Play connection with NEXTGEN NVR
- Compatible with DDNS DEMES

SOFTWARE AND APPS


- HYUVMS and HYUCONNECT for Android and iOS
- HYU VMS client software
- Cloud P2P service: hyucloud.hyundai-security.es



ACCESSORIES



DIMENSIONS

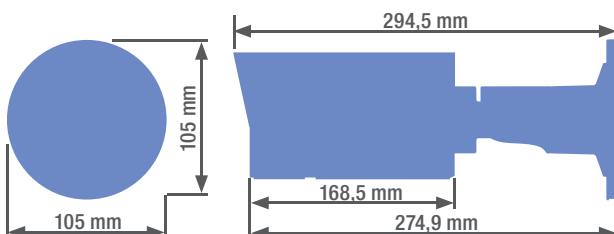

CAMERA

Image sensor	1/3 CMOS, 4 MP	
Effective pixels	2688(H) x 1520(V)	
Resolution	Stream 1	4MP (20 fps), 3MP (20 fps), 1080P, 720P (25/30 fps)
	Stream 2	640x360, (25/30 fps), 352x288 (25 fps), 352x240 (30 fps)
Electronic shutter	1/3s ~ 1/100.000s	
IR illumination	30 meters	
Minimum illumination	0,01 lux F1.2 (AGC On) / 0 lux IR ON	

LENS

Lens	2,8 ~ 12 mm
Viewing angle	108° ~ 31°
Focus mode	Auto

FUNCTIONS

Day/night	Auto (ICR), programmed
OSD menu	Supported
Backlight compensation	BLC (configurable area), real WDR 120 dB
Noise reduction	3D-DNR
ROI	1 fixed zone
Motion detection	Supported
Privacy mask	Supported
Image configuration	Brightness, saturation, contrast, sharpness, mirror

AUXILIARY INTERFACE

Memory card slot	MicroSD/SDHC/SDXC card slot (up to 128 GB)
------------------	--

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±25%)
Consumption	11W
PoE	802.3 af
Working temperature	-30°C ~ +60°C
RH	≤95% (without condensation)
Protection	IP67

PHYSICAL FEATURES

Case	PVC & metal
Dimensions	91,6 x 105 x 294,5 mm
Weight	1200 g